

ROKAMAT
easy working

A construction worker in a dark blue long-sleeved shirt, dark grey cargo pants, and blue sneakers is using a ROKAMAT hydraulic wall scraper. The worker is wearing safety glasses and yellow earplugs. The machine is orange and black, with a long black hose connected to a power source. The worker is standing on a floor covered with debris from the wall. The wall is light-colored and has a large, irregularly shaped area of peeling plaster or paint. The machine is being used to remove this material.

RANGE OF MACHINES

2025/26

SPECIAL SOLUTIONS FOR CONSTRUCTION



ROKAMAT provides special solutions for construction.
Innovative machine technology for:

- ▣ EIFS and ETICS
- ▣ Drywall construction
- ▣ Renovation
- ▣ Concrete and plaster finishing



made **in germany** since 1982

ROKAMAT
easy working

Product overview

Cordless line (**CAS** system)

Cordless cutter Tigris CX NEW	4 – 5
Cordless universal grinder: Chameleon CX NEW + RVC C	6 – 7
Cordless plaster finishing machine PFM CX	8 – 9
Cordless concrete power trowel Skate CX NEW	10 – 11
Cordless concrete vibrator CV CX NEW	12 – 13
Batteries + Chargers CAS	14 – 15

Grinding machines

Universal machine Chameleon	16 – 19
Long neck grinder Heron	20 – 23
Renovation grinder Gex	24 – 26

Formwork cleaning machine

Formwork cleaning machine Hedgehog W	28 – 29
---	---------

Joint cutter

Joint cutter Piranha Cutter	30 – 31
------------------------------------	---------

Vacuum cleaners

Rucksack vacuum cleaner (for EIFS and ETICS) RVC-L	32
All-purpose vacuum cleaner (dust class M) Metabo ASR 35 M ACP	33

Plaster finishing machines

Plaster finishing machine compact PFM 5	34 – 35
Plaster finishing machine PFM	36 – 37
Plaster finishing machine with water injection PFM W	38 – 39
Accessories for plaster finishing machines	40 – 41


Concrete power trowel

Concrete power trowel Skate	42 – 43
------------------------------------	---------

NEW

Cordless cutter Tigris CX

ITEM NO. 53000
ITEM NO. 54000

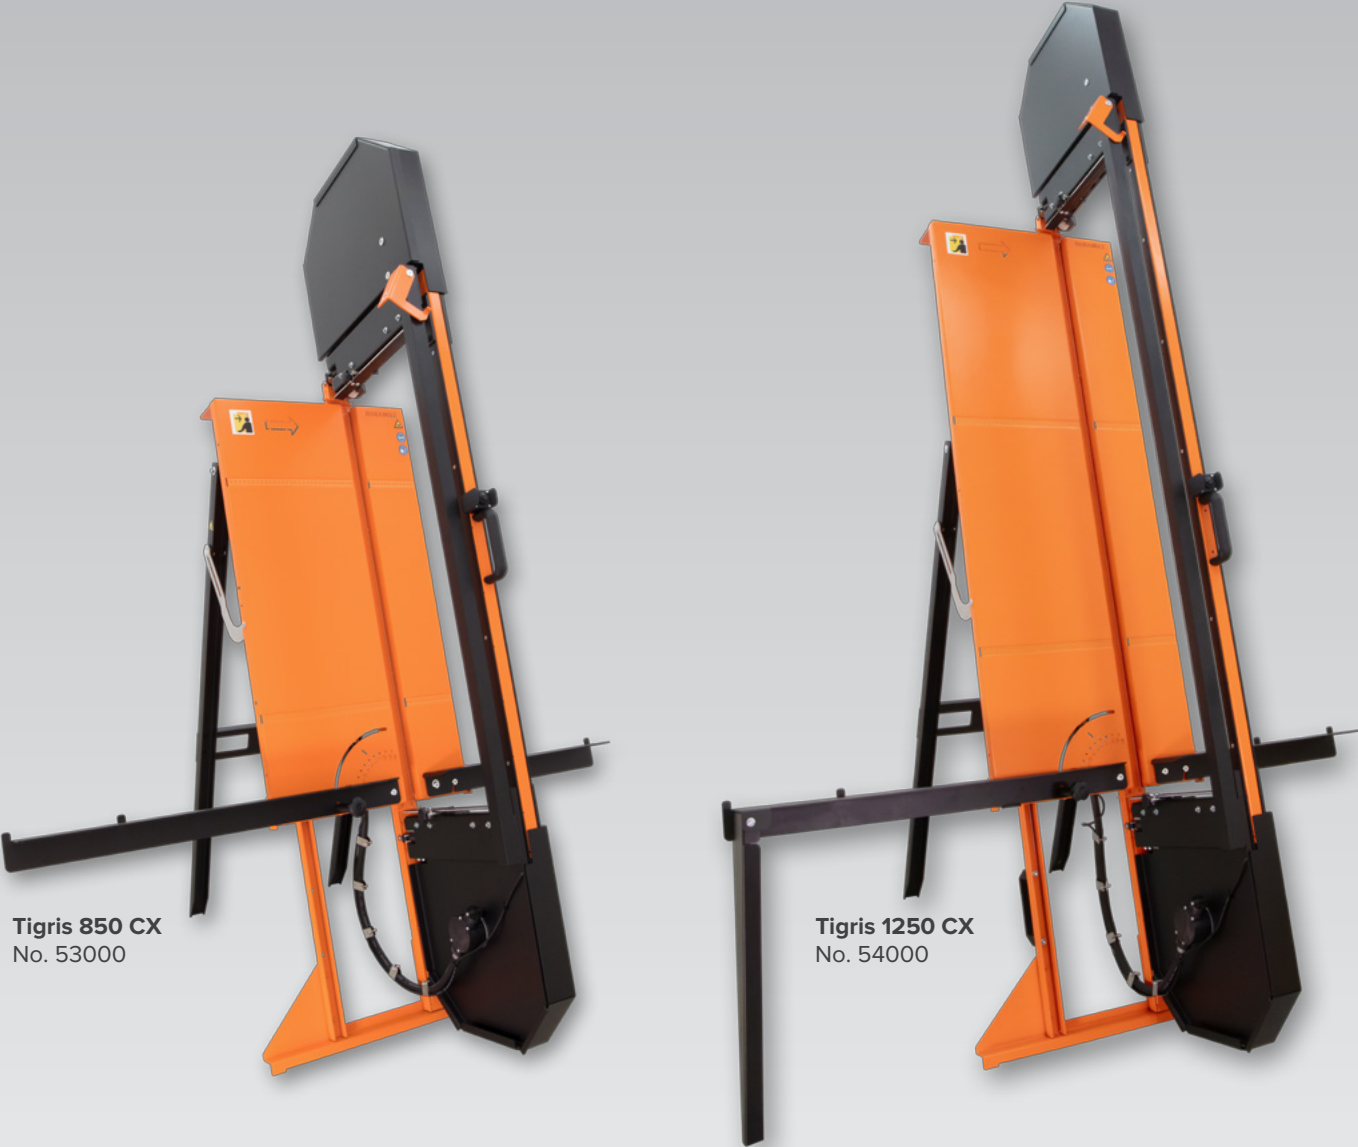

Tigris 850 CX
No. 53000

Tigris 1250 CX
No. 54000

Cuts almost all
insulation boards

Optimal for working on
scaffolding (Tigris 850 CX)

Advantages

- No cumbersome cable – batteries compatible with CAS
- Cutting of polystyrene, styrodur, mineral wool (rock + glass wool), hemp fiber panels, plasterboards, aerated concrete and many more materials
- Also suitable for wood fibre insulation boards (max. density 160 kg/m³)
- With angle adjustment for bevel, wedge and mitre cuts
- Suction device included



Accessories


Cutting wire	Unit	No.	Fig.
Cutting wire for Tigris 850 CX	1	53050	1
Cutting wire for Tigris 1250 CX	1	54050	–
Roller guide	Unit	No.	Fig.
Roller guide for Tigris CX	1	53390	–
Optional accessory	Unit	No.	Fig.
Foot pedal	1	53374	–
Add-on package for wood fiber insulation boards Tigris 850 CX: incl. cutting wire “wood fiber” (item no. 53078), additional supports, reinforced support brackets, 2x spacer for support bracket	1	53700	2
Add-on package for wood fiber insulation boards Tigris 1250 CX: incl. cutting wire “wood fiber” (item no. 54055), additional supports, 2x spacer for support bracket	1	54700	–
Cordless blow gun (CAS) (For regular cleaning of the device)	1	53710	–



Technical Data

	Tigris 850 CX	Tigris 1250 CX
Voltage Li-Ion battery	18 V	
Capacity Li-Ion battery	5,2 Ah Li-Ion	
Weight	approx. 26 kg	approx. 31 kg
Cutting length	850 mm	1250 mm
Cutting depth at 0°	340 mm	

Scope of supply

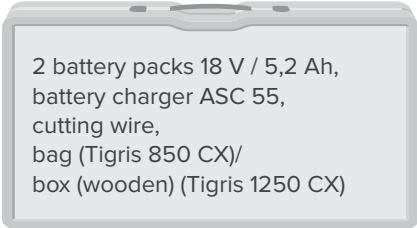

Battery packs + battery chargers:
see page 15.

Cordless universal grinder

Chameleon CX

ITEM NO. 26000

NEW



► Grinding and roughening EIFS and ETICS insulation boards

► Optimal for working on scaffolding

Advantages

- Pure freedom of movement – no cumbersome cable
- Brushless battery motor with enormous torque
- With speed control (optimal adjustment to each application)
- Rokamat is CAS partner: One battery, many solutions
- Smooth operation thanks to counter-rotating tool discs
- **Cordless Grinding System:** in combination with the rucksack vacuum cleaner **RVC-L C:** see page 32



Accessories


Tool discs: see pages 18 + 19

Battery packs + battery chargers: see page 15.

Technical Data

Speed (no-load)	120-400 r.p.m.
Voltage Li-Ion battery	18 V
Capacity Li-Ion battery	5,2 Ah Li-Ion (Standard)
Weight (hand tool)	approx. 2,1 kg

Scope of supply

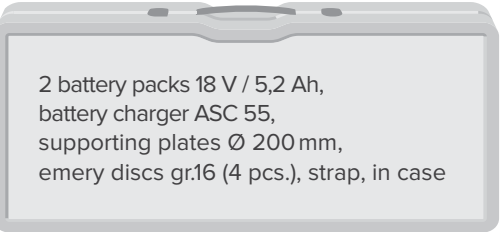

Cordless plaster finishing machine

PFM CX

ITEM NO. 36000



Perfect for machining plaster

Finishing wall renders of all types

Abrading

Smoothing concrete elements



Relaxed machining on large wall surfaces



With speed control!



Also suitable for abrading

Advantages

- With speed control (optimal adjustment to each application)
- Pure freedom of movement – no cumbersome cable
- 50 % time saving compared to manual work
- Brushless motor
- Uniform structure due to large support surface (Ø 350 mm)
- Rokamat is CAS partner: One battery, many solutions

Accessories

Sponges and more accessories see pages 40 +41
Trowels for smoothing concrete elements see page 43
Battery packs + battery chargers see page 15.

Technical Data

Speed (no-load)	65-250 r.p.m.
Voltage Li-Ion battery	18 V
Capacity Li-Ion battery	5,2Ah Li-Ion (Standard)
Weight	approx. 2,7 kg (without battery)

Scope of supply

2 battery packs 18 V / 5,2 Ah, battery charger ASC 55, supporting plate (Velcro System) Ø 350 mm, sponge 49300, in case
--

Cordless concrete power trowel

Skate CX


ITEM NO. 93060

NEW



▣ **Levelling and trowelling fresh concrete and screed**

▣ **Smoothing concrete elements**

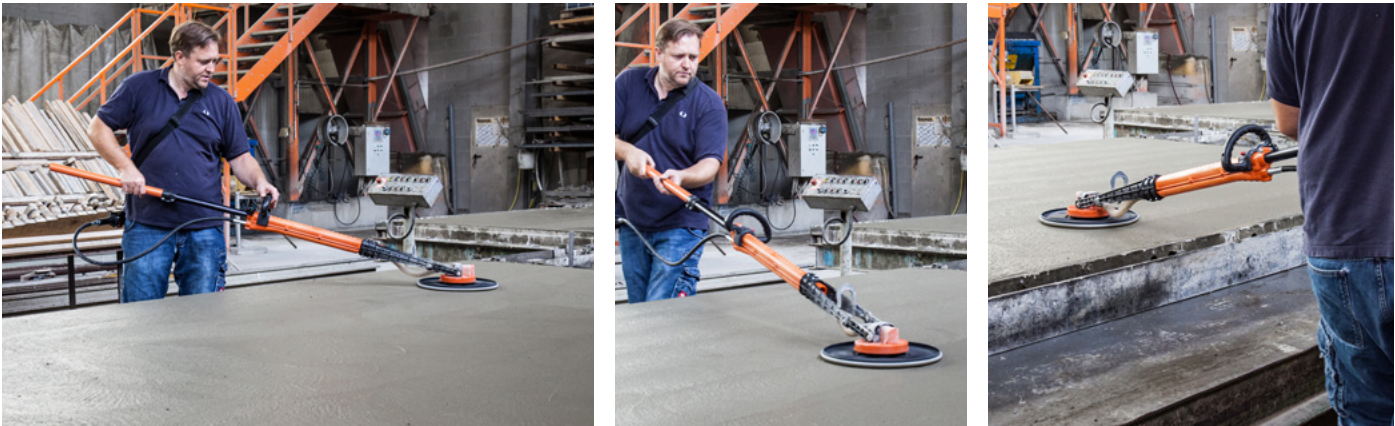

Advantages

- ▣ NEW! With speed control (optimal adjustment to each application)
- ▣ Freedom of movement
- ▣ Easy handling
- ▣ Powerful Li-Ion battery
- ▣ Rokamat is CAS partner: One battery, many solutions

Accessories

Trowels and trowel with blades see page 43

Battery packs + battery chargers see page 15.

Technical Data

Speed (no-load)	300 r.p.m.
Voltage Li-Ion battery	18 V
Capacity Li-Ion battery	5,2 Ah Li-Ion (Standard)
Weight (hand tool)	approx. 3,1kg

Scope of supply

2 battery packs 18 V / 5,2 Ah, battery charger ASC 55, supporting plate (Velcro System) Ø 350 mm, trowels 48100 and 48200, strap, in case

Cordless concrete vibrator

CV CX

ART.-NR. 91400
ART.-NR. 91500
ART.-NR. 91600

NEW



CV CX 43-130

CV CX 43-200

CV CX 43-300

▶ **Compacting concrete**

▶ **Compacting concrete joints**

Advantages

- ▶ Freedom of movement – no cumbersome cable
- ▶ NEW! Brushless battery motor: even more powerful + longer runtime!
- ▶ Various versions available
- ▶ Light weight, handy and robust
- ▶ Rokamat is CAS partner: One battery, many solutions



Models

		No.
CV C 43-130	Ø 43 mm with 1,3 m flexible drive shaft	91400
CV C 43-200	Ø 43 mm with 2,0 m flexible drive shaft	91500
CV C 43-300	Ø 43 mm with 3,0 m flexible drive shaft	91600

Accessories


Optional accessory	Unit	No.	Fig.
Shoulder strap	1	05100	1



Technical Data

Vibrator	Ø 43 / 280 mm
Motor output	18 V / 5,2 Ah
Deflection	ca. 4 mm
Effective diameter	ca. 430 mm

Scope of supply

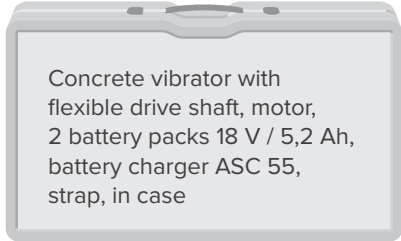

Working with different brands? All with just one CAS battery pack.



cordless-alliance-system.com

Advantages

- ▣ **CAS** batteries are compatible with over 45 brands. Simply combine your batteries and chargers with more than 450 **CAS** brand tools.
- ▣ Saves time
- ▣ Lower costs
- ▣ Protects the environment
- ▣ 100 % compatibility in the 18 V class

Accessories

Batteries + chargers	VPE	Art. Nr.	Abb.
Battery pack 18 V / 5,2 Ah (Li-Ion)	1	08050	—
Standard battery charger ASC 55	1	08060	—
Fast battery charger ASC 145	1	08065	2
Premium package battery: Fast battery charger ASC 145 + battery pack 18 V / 5,2 Ah	1	08066	—

· Batteries and chargers are compatible with all machines in the Rokamat battery line and **CAS** partners.



Universal machine Chameleon

ITEM NO. 20000



▣ Grinding, stripping wallpaper, smoothing, cleaning, polishing – all with one machine



Grinding EIFS and ETICS boards



Cleaning facades



Stripping wallpaper


Advantages

- ▣ Light weight due to separation of tool and motor
- ▣ Smooth operation thanks to counter-rotating tool discs
- ▣ One machine for numerous applications (wide range of accessories)
- ▣ Large operating surface (2x Ø 200 mm)
- ▣ Continuous speed control to optimise each different application
- ▣ Dust-free working with our vacuum cleaners (see pages 32 + 33)

Technical Data

Speed (no-load)	150 – 570 r.p.m.
Power consumption	1 000 W
Weight (hand tool)	Tool: approx. 2,4 kg Motor: approx. 2,4 kg

Scope of supply

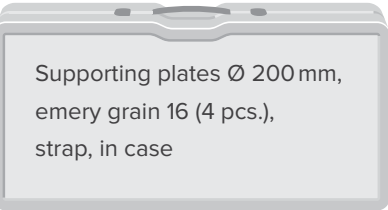

Supporting plates Ø 200 mm,
emery grain 16 (4 pcs.),
strap, in case

Accessories Chameleon Ø 200 mm

Table with 4 columns: Cleaning, Unit, No., Fig.
Rows include: Steel brushes, fine (2, 21200, 1), Steel brushes, medium (2, 21300, 1), Steel brushes, coarse (2, 21400, 1), Special steel brushes, medium (2, 23000, 1), Special steel brushes, coarse (2, 23100, 1), Nylon brushes, fine (2, 21500, 2), Nylon brushes, coarse (2, 21600, 2), Steel / nylon brushes (2, 22500, -)

- Cleaning formwork units: Concrete residues on a pan or on steel frames can be easily removed with steel brushes. Once the surface skin is waxed with nylon brushes, it is ready for further use.
- Removing old, loose plaster, render and paint
- Cleaning exterior facades of moss and algae
- Cleaning and preparing plaster for new coverings

Cleaning and polishing

Table with 4 columns: All pads to use with the supporting plates No. 20700, Unit, No., Fig.
Rows include: Cleaning pad, coarse (2, 23500, 3), Cleaning pad, medium (2, 23400, 3), Cleaning pad, fine (2, 23900, 3), Polishing pad, very fine (2, 23300, 3), Lambskin pad, superfine (2, 23600, 4)

- Cleaning buildings and facades, polishing "marble effect" or parquet

Table with 4 columns: Scratching, Unit, No., Fig.
Row: Scratching discs "longlife" (2, 20100, 5)

- Nail plates with pointed pins for scratching sgraffito. Large working surface ensures both safe and flat working with the nailplates. (Use with guide rails no. 22210).

Table with 4 columns: Removing old render, Unit, No., Fig.
Row: Widia discs (2, 21700, 6)

- For removing sanding old plasters and for roughening dry plaster. Adhesive residues of carpet glue and tiling adhesives can be milled off, as well as heavy fouling on industrial floors (area performance for tiling adhesive: about 20–30 m² per hour). Not suitable for Chameleon CX.

Table with 4 columns: Smoothing, Unit, No., Fig.
Rows: Smoothing attachments (2, 25200, 7), to use with base plate (2, 25000, -)

- Smoothing plates for abrading render and plaster after setting. (Use with guide rails no. 22210).

Table with 4 columns: Flattening concrete, Unit, No., Fig.
Row: Flattening plate (2, 22700, 8)

- For flattening concrete easily and quickly. To be used before the material has taken final set (sprayed concrete).

Table with 4 columns: Flattening plates with trowel blades (2, 22600, 9)

- For hard trowelling (e. g. wet concrete inside silos)








Table with 4 columns: Stripping wallpaper, Unit, No., Fig.
Rows: NEW! Premium package "Removing wallpaper" (Set, 22350, -), Perforating discs (2, 22200, 1)

- Perforating wallpaper so that it can be easily soaked and stripped

Table with 4 columns: NEW! Shaving discs with quick change system (2, 22360, 2), NEW! Blades for quick change system (6 pcs.) (Set, 22365, -)

- For removing wallpaper, for cleaning shuttering or for other shaving work

Table with 4 columns: Guide rails (2, 22210, 3)

- Please use in combination with perforating and shaving discs

Table with 4 columns: Grinding, Unit, No., Fig.
Row: Supporting plates with velcro (2, 20700, 4)

- For mounting sanding discs, grinding grids, metal abrasive discs, cleaning and polishing pads

Table with 4 columns: Sanding discs, Unit, No., Fig.
Rows: Emery grain 16 (for polystyrene) (4, 20816, 5), Emery grain 24 (4, 20824, 5), Emery grain 40 (6, 20840, 5), Emery grain 60 (for gypsum) (6, 20860, 5), Emery grain 80 (6, 20880, 5), Emery grain 100 (6, 20810, 5), Emery grain 120 (6, 20812, 5)

- Sanding discs for professional painting and varnishing
- Surface grinding: Polystyrene insulating boards, thermal insulating systems (EIFS and ETICS), taped board joints, plaster background (1st layer of the render), roughening up polystyrene
- Removing adhesive residues (carpets)
- Cleaning shuttering pans (when concrete residues are hardened)

Table with 6 columns: JÖST Superpads, Unit, No., Fig.
Rows: Grain 40 (6, 28040, 6), Grain 60 (6, 28060, 6), Grain 80 (6, 28080, 6), Grain 120 (6, 28012, 6), Grain 180 (6, 28018, 6), Grain 220 (6, 28022, 6)

- Unique full-surface perforations and patented Velcro-type system allows full-surface dust extraction (no clogging), higher sanding capacity and shorter sanding time.







Table with 6 columns: Grinding grids, Unit, No., Fig.
Rows: Grinding grit 80 (4, 27080, 7), Grinding grit 100 (6, 27010, 7), Grinding grit 120 (6, 27012, 7), Grinding grit 180 (6, 27018, 7), Grinding grit 220 (6, 27022, 7)

- For plaster, filler, etc.

Table with 4 columns: Aggressive grinding, Unit, No., Fig.
Rows: Metal abrasive discs, fine (2, 22405, 8), Metal abrasive discs, medium (2, 23205, 8), Metal abrasive discs, coarse (2, 22905, 8)

- For grinding timber, brick, screed, carpet residue, fibreglass, gas concrete and many other materials

Table with 4 columns: Optional accessory, Unit, No., Fig.
Row: Shoulder strap (1, 05100, 9)



Long neck grinder **Heron**

ITEM NO. 60100



▣ Grinding plasterboard, wall board and concrete burrs

▣ Grinding silicate plaster (synthetic resin) and epoxy resin

▣ Grinding and polishing walls, floors and ceilings

▣ Grinding barrier paint (containing latex, fiber-reinforced)



Grinding large surfaces very quickly



Removing plaster with a PCD disc



Grinding concrete burrs


Advantages

- ▣ Ideal for aggressive grinding/milling
- ▣ Light weight: hand tool approx. 2,4 kg
- ▣ High engine power (1 500 W)
- ▣ Smooth operating, low-vibration
- ▣ Short and long-neck grinder in one (grinding up to 3 m height)
- ▣ Flexible and robust grinding head
- ▣ Grinding tight into the edges with special dust hood
- ▣ Dust-free working with our vacuum cleaners (see page 32 + 33)

Technical Data

Speed (no-load)	640 – 2 270 r.p.m.
Power consumption	1 500 W
Weight (hand tool)	approx. 2,4 kg
Length	1050 – 1550 mm

Scope of supply

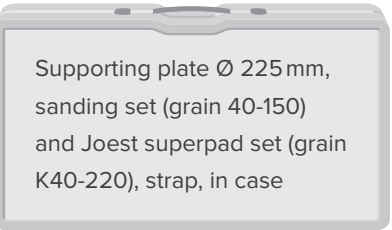

Accessories Heron

Ø 225 mm

Supporting plate	Unit	No.	Fig.
Supporting plate Ø 225 mm with foam rubber base and velcro	1	60150	1

· For all accessory discs Ø 225 mm

Cleaning and polishing	Unit	No.	Fig.
Cleaning pad, coarse	6	62200	–
Cleaning pad, medium	6	62000	2
Cleaning pad, fine	6	62100	–
Polishing pad, very fine	2	62800	–
Lambskin pad, superfine	2	62900	3

· Cleaning pads for cleaning and polishing exposed concrete and removing release agents
· Polishing pad for polishing wax paints and exposed concrete
· Lambskin pad for polishing work

Grinding*	Unit	No.	Fig.		Unit	No.	Fig.	
Emery grain 80	6	61300	4		Emery grain 120	6	61500	4

· Sanding discs for professional painting and varnishing

JÖST Superpads*		Unit	No.	Fig.			Unit	No.	Fig.
Grain 40	6	69840	5		Grain 80	6	69880	5	

· Unique full-surface perforations and patented Velcro-type system allows:
Full-surface dust extraction (no clogging), higher sanding capacity and shorter sanding time

Grinding grids*				Unit	No.		Fig.
Grain 120	6	69712	–	Grain 180	6	69718	–

· For plaster, filler etc.

Zircon grinding discs*				Unit	No.	Fig.	
Grain 80	6	82080	—	Grain 120	6	82012	—

· For sanding parquet.

***Other grain sizes available!**

Aggressive grinding	Unit	No.	Fig.
Metal abrasive disc, fine	1	60500	7
Metal abrasive disc, medium	1	60600	7
Metal abrasive disc, coarse	1	60700	7
Foam rubber base 7mm (to use for supporting plate) for metal abrasive disc medium and coarse	1	61005	–

· For grinding timber, brick, screed, carpet residue, fibreglass, gas concrete and many other materials


Diamond grinding disc “light”	1	60300	8
-------------------------------	---	-------	---

· For grinding concrete burrs, floor screeds etc.

NEW! PCD grinding disc ¹⁾	1	60400	9
NEW! PCD grinding disc “Xtreme” ²⁾	1	60405	–

· ¹⁾ For grinding silicate plaster (synthetic resin) and epoxy resin
· ²⁾ For grinding barrier paint (containing latex, fiber-reinforced)


Optional accessory	Unit	No.	Fig.
Shoulder strap	1	05100	–

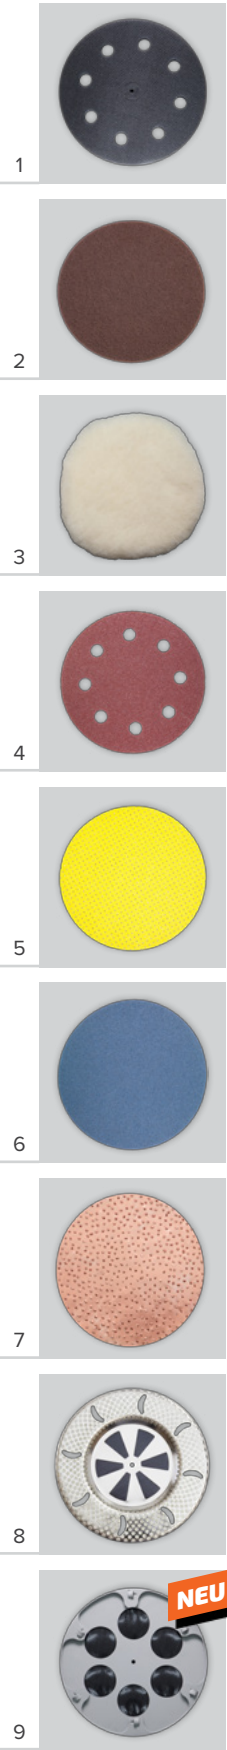

Renovation grinder

Gex

ITEM NO. 85000

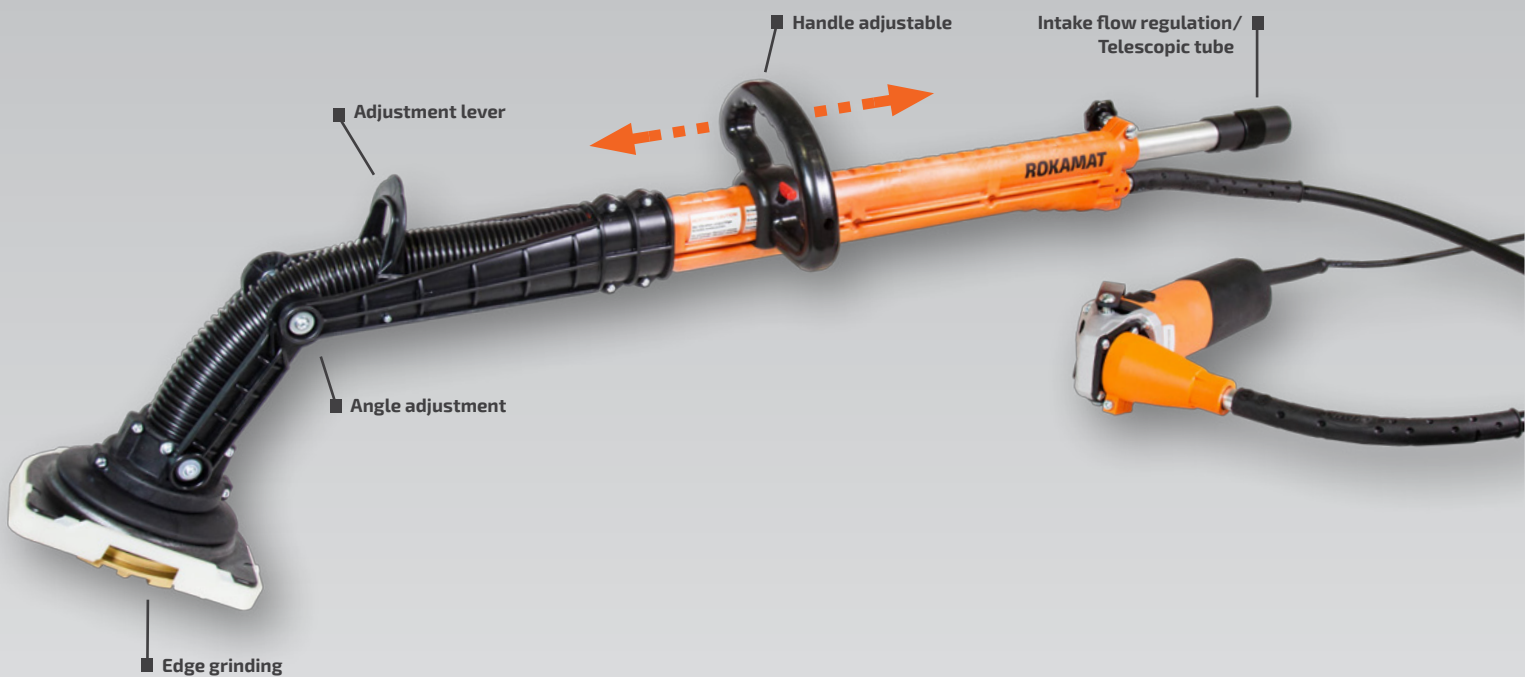

► Aggressive grinding
(e.g. concrete renovations)

► Removing of tile adhesives,
concrete burrs, bitumen, hard
plaster, paint and coatings

► Polishing of stone floors

► Roughening of surfaces



Removing old plaster and paints



Grinding bitumen coating
with PCD grinding disc



Ceiling grinding


Advantages

- Versatile concrete and renovation grinder for floors, walls, and ceilings
- Powerful grinding action (1 500 W) with minimum effort
- Continuous speed control for optimal adjusting to different applications
- Short-and long-neck grinder in one (grinding up to 3 m height)
- Designed for edge grinding and dust suction (vacuum cleaner see page 39)
- Ergonomic working due to the grinding head's adjustable angle
- Awarded with Germany's top worker protection award: VISION ZERO – category „Health Protection”

Technical Data

Speed (no-load)	2 580 – 9 140 r.p.m.
Power consumption	1 500 W
Weight (hand tool)	approx. 3,1 kg
Length	110 – 160 cm


Scope of supply

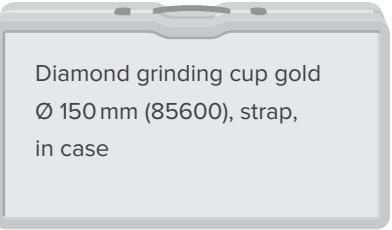

Accessories Gex

Ø 150 mm

Diamond grinding cup				Unit	No.	Fig.		
Diamond grinding cup gold				1	85600	1		
· High durability. For universal use, hard material, all sorts of concrete, brickwork and others								
Diamond grinding cup black				1	85100	2		
· High durability. For abrasive material, asphalt, screed, tile cement, gas concrete, old plaster and others								
PCD grinding disc				Unit	No.	Fig.		
PCD grinding disc				1	85200	3		
· With polycrystalline diamond coat for removing bitumen coating, epoxy resin, urethan and latex paint, old plaster and others, also for grinding concrete aggressive								
Diamond grinding disc				Unit	No.	Fig.		
Diamond grinding disc “light”				1	85400	4		
· For light grinding work (e. g. concrete burrs, floor screeds etc.), for finishing concrete								
Aggressive grinding				Unit	No.	Fig.		
Hard metal rasping disc for edge grinding				1	85300	5		
Hard metal rasping disc for surface grinding				1	85305	5		
· For removing adhesive residues and old render								
Hard metal rasping disc, fine				1	84200	6		
· For aggressive grinding of timber								
Supporting plate				Unit	No.	Fig.		
Special supporting plate with velcro				1	84100	7		
· For mounting sanding discs								
Abrafilm polishing set				Unit	No.	Fig.		
Abrafilm polishing set: grit 60, 120, 240, 400, 800, 1200, 2000, 3000				Set	85910	8		
· For varnishing of stone, marble, terrazzo floors (high gloss)								
Abrafilm		Unit	No.	Fig.	Unit	No.	Fig.	
Grain 40		6	85900	8	Grain 80	6	85904	8
Grain 60		6	85902	8	Grain 100	6	85906	8
· Extremely durable and tearproof film carrier, zirconia grit (nearly as hard as diamond) Excellent cutting properties. Use on even surfaces, i.g. removing impurities on concrete (smudges after formworking) or grinding exposed concrete								
Sanding discs		Unit	No.	Fig.	Unit	No.	Fig.	
Grain 80		6	84180	9	Grain 100	6	84110	9
Zircon grinding discs				Unit	No.	Fig.		
Zircon grinding discs grain 80				6	84380	10		
Zircon grinding discs grain 100				6	84310	10		
Zircon grinding discs grain 120				6	84312	10		
· For grinding parquet								
Optional accessory				Unit	No.	Fig.		
Shoulder strap				1	05100	11		

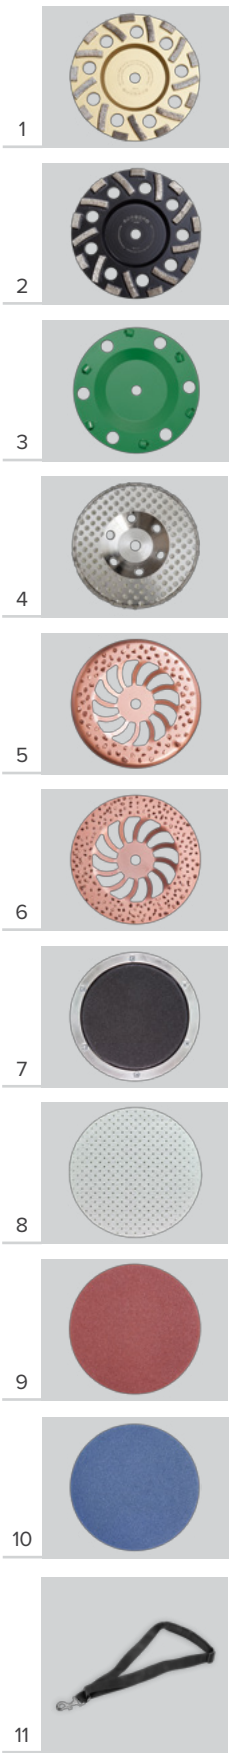

How it all began...

The work of a plasterer can be very strenuous. Thus was also the experience of the young Rolf Kammerer in his father's plastering business. One day, while laboriously working on sgraffito he thought to himself: "There must be an easier way to do this."

This thought was to stay with him for a long time and then, it was the year 1982, it grew into an idea: the Chameleon universal machine.

This marked the birth of **Rolf Kammerer – Machine-Technology**, or in short: **Rokamat**.

The power transmission by means of a flexible shaft was from the very beginning the distinguishing feature of Rokamat. Separated from the grinding unit, the motor is comfortably worn on the belt. The weight of the handpiece is reduced accordingly, enabling long, fatigue-free work.

Of course, the Chameleon was only the first step. Other ideas for machines soon followed , for example the plaster finishing machine PFM. He always had his task firm in his mind: To make the everyday work of craftsmen easier. Or to put it with our slogan: easy working.



Today, painters, plasterers and construction workers all over the world benefit from the output and the mission of the family business.

All Rokamat machines are designed and assembled in Baden-Württemberg. In other words, 100 % made in Germany.


made **in germany** since 1982



Formwork cleaning machine

Hedgehog W

ITEM NO. 69600

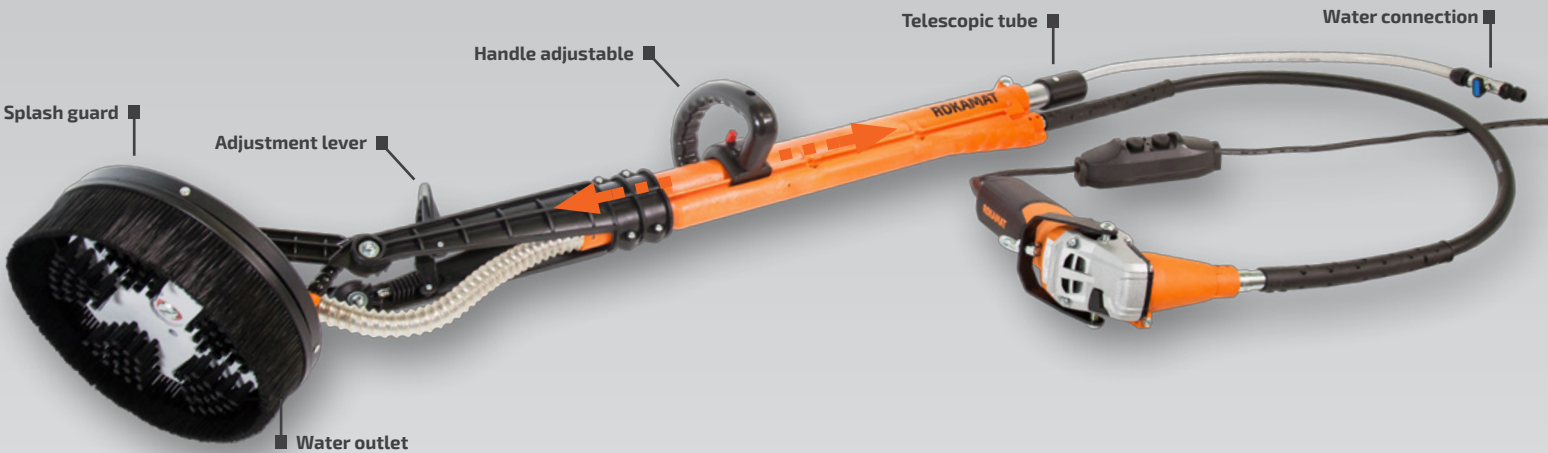

▢ Cleaning of formwork


Advantages

- ▢ Light weight (tool 3,4 kg)
- ▢ High engine power (1 000 W)
- ▢ Tool / drive separation - improves weight distribution and reduces dirt build-up in the motor
- ▢ Telescopic handle



Accessories


Ø 200 mm			
Cleaning brushes	Unit	No.	Fig.
Steel brush, fine	1	69101	1
Steel brush, medium	1	69102	1
Steel brush, coarse	1	69103	1
Special steel brush, medium	1	69107	1
Special steel brush, coarse	1	69108	1
Nylon brush, fine	1	69104	2
Nylon brush, coarse	1	69105	2
Steel / nylon brush (e.g. for cleaning granite)	1	69106	—
Supporting plate	Unit	No.	Fig.
Supporting plate with velcro	1	69110	3
Cleaning pads	Unit	No.	Fig.
Cleaning pad, coarse	2	23500	—
Cleaning pad, medium	2	23400	4
Cleaning pad, fine	2	23900	—
Optional accessory	Unit	No.	Fig.
Shoulder strap	1	05100	5

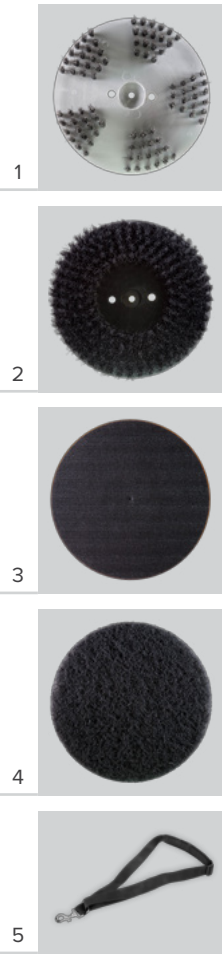

Technical Data

Speed (no-load)	480 – 1 670 r.p.m.
Power consumption	1 000 W
Weight (hand tool)	approx. 3,4 kg
Length	105 cm – 155 cm

Scope of supply

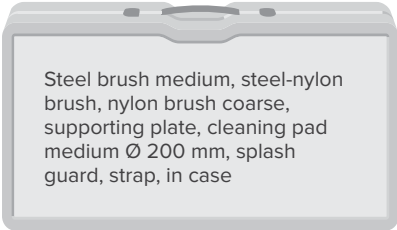

Joint cutter Piranha Cutter

ITEM NO. 90200

NEARLY DUST-FREE
RENOVATION OF
JOINTS



▶ **Special tool for hard joints and cable slots (Tuck pointing)**

▶ **Ideal for brick facades or ceramic tiles**

Advantages

- ▶ Low-vibration
- ▶ Robust aluminium housing
- ▶ Motor separated from cutting device > longer motor life
- ▶ Fatigue-free operation due to light weight tool (ca. 1,6 kg)
- ▶ Almost dust-free renovation of joints fine dust/particulates only 0,25 mg/m³ (special vacuum cleaner - see below)



Accessories

Diamond cutting wheels	Unit	No.	Fig.
Diamond cutting wheel set Ø 115 mm (milling depth 30mm)	3	90120	1
Diamond cutting wheel set Ø 125 mm (milling depth 35mm)	3	90121	–


Spacer	Unit	No.	Fig.
Spacer	1	90160	–

· For milling wider cable slots

Vacuum cleaner for Piranha Cutter	Unit	No.	Fig.
ASR 35 M ACP (Metabo) All-purpose vacuum cleaner (dust class M)	1	13800	2

· For harmful dust (dust class M)


Optional accessory	Unit	No.	Fig.
Shoulder strap	1	05100	3

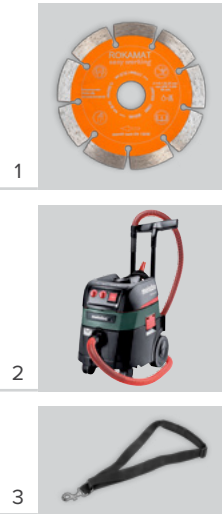

Technical Data

Speed (no-load)	2 600–9 100 r.p.m.
Power consumption	1 500 W
Weight	Tool: approx. 1,6 kg Motor: 2,6 kg

Scope of supply

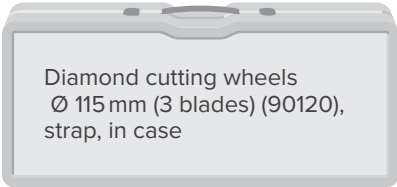

Rucksack vacuum cleaner (EIFS and ETICS) RVC-L

ITEM NO. 10000



▢ Dust-free working on scaffolding

- ▢ Freedom of movement

▢ Light weight
- ▢ Large filter bags, capacity 15l


▢ Also available as cordless version:
RVC-L C item no. 12000



Accessories

Paper filter bags	Unit	No.
15l capacity	10	10001
· For polystyrene dust		
Fabric filter bag for EIFS and ETICS	Unit	No.
15l capacity	1	10002
· Only for polystyrene dust. With zip fastener - to be emptied (reusable)		
Accessory set	Unit	No.
Turbo nozzle, suction nozzle, floor upholstery nozzle, upholstery nozzle, joint nozzle, suction brush, radiator brush, suction hose, 2 tubes, adapter	Set	10004

Scope of supply

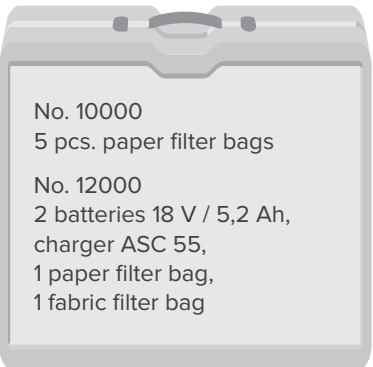

Technical Data

	Electric version	Cordless version		
Power consumption	1 100 W	18 V / 5,2 Ah (Li-Ion)	Dimensions L×W×H	20×43×63 cm
Max. air flow	60 l/s	31 l/s	Container	15 l
Max. vacuum	190 mbar	32 mbar	Dust class	L
Weight	6,5 kg	6,6 kg		

All purpose vacuum cleaner ASR 35 M ACP

ITEM NO. 13800



▢ Special Vacuum Cleaner for harmful dust (dust class M)

- ▢ Saves both costs and time thanks to automatic MPulse filter cleaning during continuous use


▢ Antistatic basic equipment prevents static charge n using appropriate accessories

▢ If the optimum suction performance falls below a certain level, the filters are vibrated immediately

Accessories

Plastic bag	Unit	No.
for 35 l container	5	13008
· For harmful dust (dust class M)		
Nonwoven fabric filter bag	Unit	No.
for 35 l container	5	13009
· For non-mineral dust (e. g. house dust)		
Accessory set	Unit	No.
Tube handle with supplementary air slide, 2 x suction tube plastic, floor nozzle	Set	13020
· For the floor cleaning on the construction site		
Adapter	Unit	No.
Stepped adapter for Ø mm: 25,5 – 26,5 30,5 – 32,5 36,0 – 38,0	Set	13015

Scope of supply

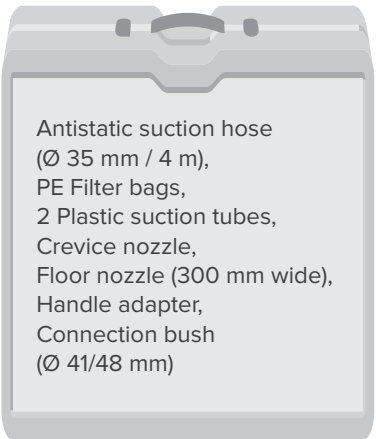

Technical Data

Power consumption	1 400 W	Container	gross 35l		
Max. air flow	4 380 l/min		dust 25l	Weight	16,0 kg
Max. vacuum	270 mbar		water 22l	Dust class	M

Plaster finishing machine compact

PFM 5

ITEM NO. 32000



▶ Machining plaster, lime-cement render, clay and fine finish plaster

▶ Sponging filler compounds

▶ Abrading render

▶ Gypsum multi finish



Continuous speed control



Smoothing up to the edges



Easy handling

Advantages

- ▶ Perfect for small spaces
- ▶ Ideal for working on scaffolding
- ▶ Uniform structure due to large headed work surface
- ▶ Cost effective (saving approx. 50 % of time)
- ▶ Continuous speed control for optimal adjusting to different types of plaster
- ▶ Also available as cordless version - see page 8


Accessories

Sponges and more accessories see pages 40 +41.
Trowels for smoothing concrete elements see page 43.

Technical Data

Speed (no-load)	75 – 340 r.p.m.
Power consumption	1 000 W
Weight	approx. 4,0 kg

Scope of supply

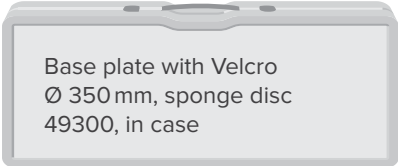

Plaster finishing machine

PFM

ITEM NO. 30000



▢ Machining plaster, lime-cement render, clay and fine finish plaster

▢ Sponging filler compounds

▢ Abrading render

▢ Gypsum multi finish



New engine technology: Lower rotation speed possible
→ for a perfect surface structure



Smoothing up to the edges



Relaxed machining due to low machine weight

Advantages

- ▢ Light weight
- ▢ Uniform structure due to large headed work surface
- ▢ Cost effective (saving approx. 50 % of time)
- ▢ Continuous speed control for optimal adjusting to different types of plaster
- ▢ Tool / drive separation > improves weight distribution and reduces soiling


Accessories

Sponges and more accessories see pages 40 +41.
Trowels for smoothing concrete elements see page 43.

Technical Data

Speed (no-load)	75 – 340 r.p.m.
Power consumption	1 000 W
Weight	Tool: approx. 2,4 kg Motor: approx. 2,4 kg

Scope of supply

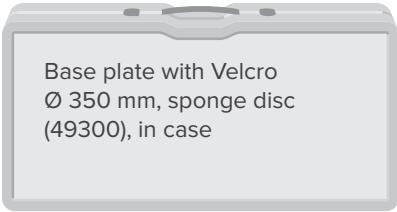

Plaster finishing machine with water injection

PFM W

ITEM NO. 40000



▶ **Machining plaster, lime-cement render, clay and fine finish plaster**

▶ **Sponging filler compounds**

▶ **Gypsum multi finish**



Water regulation



Sophisticated engine technology: Lower rotation speed possible
→ for a perfect surface structure

Advantages

- ▶ Light weight
- ▶ With water injection for generating an optimal filler slurry
- ▶ Cost effective (saving approx. 70 % of time)
- ▶ Continuous speed control for optimal adjusting to different types of plaster
- ▶ Tool / drive separation > improves weight distribution and reduces soiling

Accessories

Sponges and more accessories see pages 40 +41
Trowels for smoothing concrete elements see page 43

Technical Data

Speed (no-load)	75 – 340 r.p.m.
Power consumption	1 000 W
Weight	Tool: approx. 2,8 kg Motor: approx. 2,4 kg

Scope of supply



Accessories Plaster
Finishing Machines

Adhesive System Ø 250 mm


Sponge discs	Unit	No.	Fig.
Sponge disc, coarse	1	33000	1
Spare sponge, coarse	1	33100	1
Sponge disc, fine	1	33400	1
Spare sponge, fine	1	33500	1
· For sponging plaster and lime-cement render, for generating a fine surface structure or for sponging filler compounds and clay plaster			
Optional accessory for PFM/ PFM W	Unit	No.	Fig.
Shoulder strap	1	05100	2



Accessories Plaster
Finishing Machines

Velcro System Ø 350 mm

Base plate	Unit	No.	Fig.
for all accessory discs Ø 350 mm (No. 48100 - 49900)	1	48000	1
Rubbing plates	Unit	No.	Fig.
Rubbing plate with velcro, perforated	1	48100	2
Rubbing plate with velcro, smooth*	1	48200	2
· For smoothing mortar *Perfect for machining Fine Finish Plaster			
Sponge discs	Unit	No.	Fig.
Sponge with velcro, coarse	1	49300	3
Sponge with velcro, fine	1	49400	4
Sponge on plastic backing with velcro, coarse*	1	48300	3
Sponge on plastic backing with velcro, fine*	1	48400	4
· For sponging plaster and lime-cement render, for generating a fine surface structure or for sponging filler compounds and clay plaster			
Sponge with Velcro, superfine	1	49500	5
Spone on plastic backing with velcro, superfine*	1	48500	5
· For generating a fine surface structure *Sponges on plastic backing can be worked off completely			
Sponge with velcro, blue	1	49800	–
Sponge with velcro, brown (e.g. for clay plaster)	1	49900	6
STRUCTURA Hydro sponge ring on plastic backing with velcro For a perfect surface structure (lime-cement render)	1	48800	7
· For fine plastering (very fine grain)			
Felt disc	Unit	No.	Fig.
Felt disc with velcro	1	49600	–
· Rubbing interior / exterior lime-cement render surfaces			
Smoothing disc	Unit	No.	Fig.
Smoothing disc with velcro	1	34550	8
· For abrading render and plaster after setting Only suitable for use with PFM / PFM 5 / PFM W / PFM WT.			
Ø 450 mm			
Trowel	Unit	No.	Fig.
Trowel with blades Ø 450 mm	1	34300	9
· Finishing wall renders of all types Before using with PFM C material must be checked for compatibility.			
Premium package “Gypsum multi finish”	Unit	No.	Fig.
Sponge on plastic board, trowel, supporting plate and polishing pad	Set	34305	–

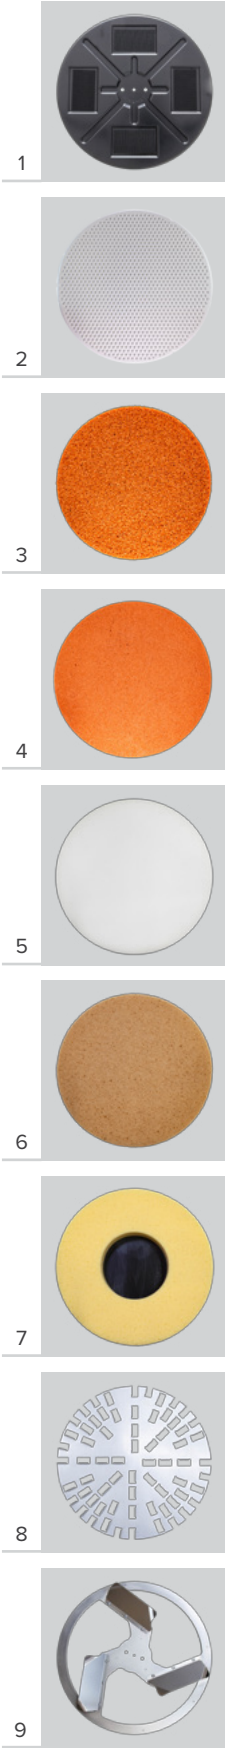

Concrete power trowel

Skate

ITEM NO. 93000



▢ Levelling and trowelling fresh concrete and screed

▢ Smoothing concrete elements



Levelling fresh concrete



Spine friendly working

Advantages

- ▢ Perfect compact finish
- ▢ Easy handling
- ▢ Quick and efficient working
- ▢ Perfect flatness on small and large areas

Accessories

Base plate with velcro Ø 350 mm	Unit	No.	Fig.
Base plate with velcro	1	93200	1
Trowels	Unit	No.	Fig.
Trowel with velcro, perforated	1	48100	2
· Pre-Trowelling - levelling unevenness and holes			
Trowel with velcro, smooth Ø 350 mm	1	48200	3
· Trowel finishing on fresh concrete and screed areas			
Trowel (stainless steel) with velcro, Ø 350 mm	1	48900	4
Trowel (stainless steel) with velcro, Ø 215 mm	1	34900	4
Base plate (to use with trowel N° 34900)	1	69110	—
· Smoothing concrete elements and trowel finishing on fresh concrete and screed areas			
Trowel	Unit	No.	Fig.
Trowel with blades Ø 450 mm	1	93100	5
· For Finishing concrete and screed areas.			
Optional accessory	Unit	No.	Fig.
Shoulder strap	1	05100	—



Technical Data

Speed (no-load)	85 – 340 r.p.m.
Power consumption	1 000 W
Weight (hand tool)	approx. 3,7 kg

Scope of supply





Contact

ROKAMAT

Kammerer GmbH
An der B10
75196 Remchingen
GERMANY

Phone: +49 7232 31393-0
Fax: +49 7232 31393-20

info@rokamat.com
www.rokamat.com



#20251124